


Taper-Lock[®] Dual Duty Pulleys

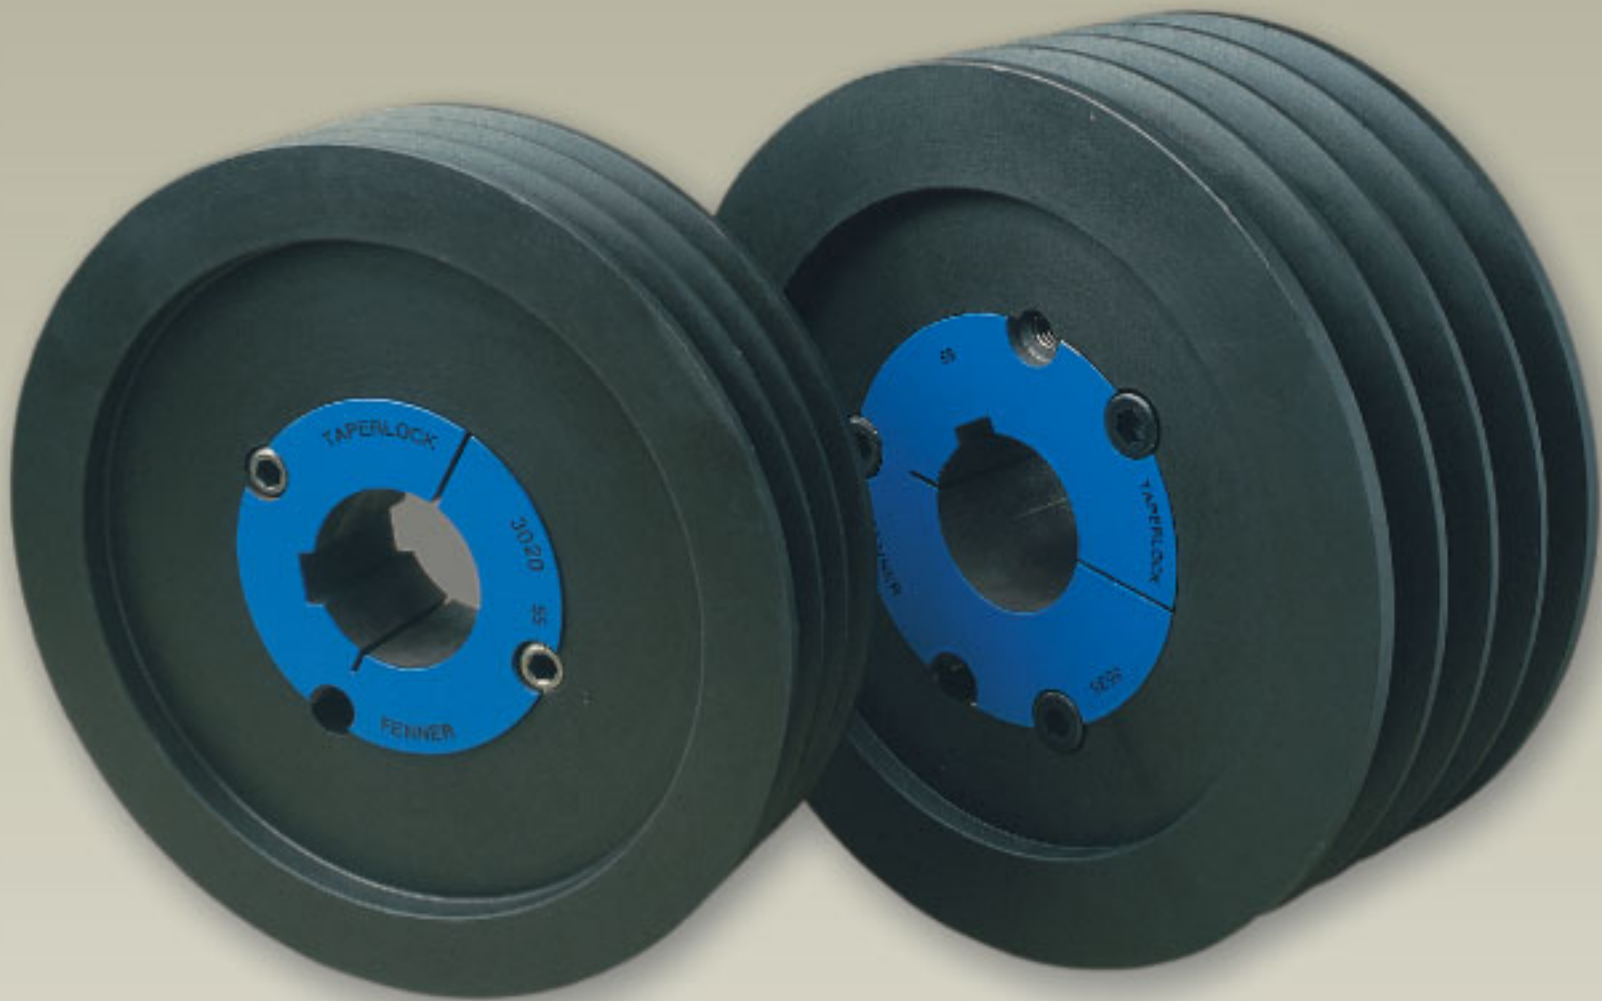





Fenner Taper-Lock[®] Dual Duty Pulleys are India's first standard range of metric pulleys. They eliminate re boring and keywaying problems since each pulley need not be finished according to different bore and keyway requirements. With Taper-Lock[®] Bushes, changes in the diameter and position of pulleys are easily made. These metric pulleys are precision machined and have dual duty grooves to perfectly match Fenner "PB" Precision Built V-Belts as well as Fenner SpacesaVer Wedge Belts.

All Fenner pulleys are manufactured from superior quality cast iron in over 400 standard sizes. Also additional sizes against special requirements and special material grade can be provided. Fenner metric pulleys conform to IS and ISO groove specifications and standard sizes can transmit upto 250 kW of power at 1440 rpm with speed ratios upto 1 : 7. The products are made available with excellent pre and post - sales service through our Branches and Distributors across the country.

Fenner

POWERTRAN

E Taper Lock® Dual Duty Pulleys

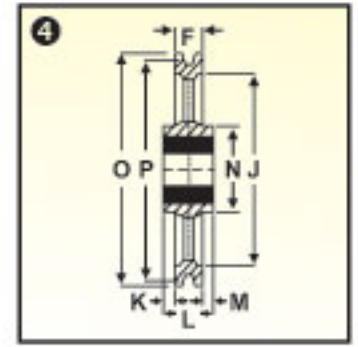

RECOMMENDED MINIMUM PULLEY PITCH DIAMETERS

V / WEDGE BELT SECTION	A	B	C	SPZ	SPA	SPB	SPC
	80	125	200	56	90	160	224





$\frac{1}{4}$ " $\frac{1}{2}$ " $\frac{3}{8}$ " $\frac{5}{8}$ "

FOR USE WITH 'SPZ' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
001Z0067		1	1108	28	1 $\frac{1}{8}$ "	1	16	-	-	22	6	60	
2Z0067	67	2	1108	28	1 $\frac{1}{8}$ "	6	28	38	6.0	22	-	-	72.5
3Z0067		3	1108	28	1 $\frac{1}{8}$ "	6	40	38	18.0	22	-	-	
001Z0071		1	1108	28	1 $\frac{1}{8}$ "	1	16	-	-	22	6.0	60	
2Z0071	71	2	1108	28	1 $\frac{1}{8}$ "	6	28	42	6.0	22	-	-	76.5
3Z0071		3	1108	28	1 $\frac{1}{8}$ "	6	40	42	18.0	22	-	-	
001Z0075		1	1108	28	1 $\frac{1}{8}$ "	1	16	-	-	22	6.0	60	
2Z0075	75	2	1210	32	1 $\frac{1}{4}$ "	6	28	46	3.0	25	-	-	80.5
3Z0075		3	1210	32	1 $\frac{1}{4}$ "	6	40	46	15.0	25	-	-	
001Z0080		1	1210	32	1 $\frac{1}{4}$ "	1	16	-	-	25	9.0	75	
2Z0080	80	2	1210	32	1 $\frac{1}{4}$ "	6	28	51	3.0	25	-	-	
3Z0080		3	1210	32	1 $\frac{1}{4}$ "	6	40	51	15.0	25	-	-	85.5
4Z0080		4	1210	32	1 $\frac{1}{4}$ "	6	52	51	27.0	25	-	-	
001Z0085		1	1210	32	1 $\frac{1}{4}$ "	1	16	-	-	25	9.0	83	
2Z0085		2	1610	42	1 $\frac{5}{8}$ "	6	28	56	3.0	25	-	-	
3Z0085	85	3	1610	42	1 $\frac{5}{8}$ "	6	40	56	15.0	25	-	-	90.5
4Z0085		4	1610	42	1 $\frac{5}{8}$ "	6	52	56	27.0	25	-	-	
5Z0085		5	1610	42	1 $\frac{5}{8}$ "	6	64	56	39.0	25	-	-	
001Z0090		1	1210	32	1 $\frac{1}{4}$ "	1	16	-	-	25	9.0	83	
2Z0090		2	1610	42	1 $\frac{5}{8}$ "	6	28	61	3.0	25	-	-	
3Z0090		3	1610	42	1 $\frac{5}{8}$ "	6	40	61	15.0	25	-	-	
4Z0090	90	4	1610	42	1 $\frac{5}{8}$ "	6	52	61	27.0	25	-	-	95.5
5Z0090		5	1610	42	1 $\frac{5}{8}$ "	6	64	61	39.0	25	-	-	
6Z0090		6	1610	42	1 $\frac{5}{8}$ "	6	76	61	51.0	25	-	-	
001Z0095		1	1210	32	1 $\frac{1}{4}$ "	1	16	-	-	25	9.0	83	
2Z0095		2	1610	42	1 $\frac{5}{8}$ "	6	28	66	3.0	25	-	-	
3Z0095		3	1610	42	1 $\frac{5}{8}$ "	6	40	66	15.0	25	-	-	
4Z0095	95	4	1610	42	1 $\frac{5}{8}$ "	6	52	66	27.0	25	-	-	100.5
5Z0095		5	1610	42	1 $\frac{5}{8}$ "	6	64	66	39.0	25	-	-	
6Z0095		6	1610	42	1 $\frac{5}{8}$ "	6	76	66	51.0	25	-	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

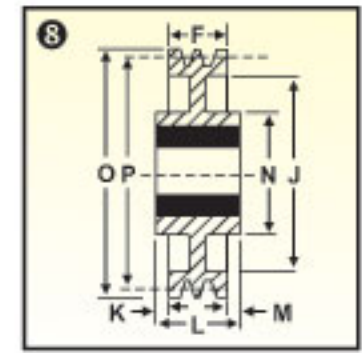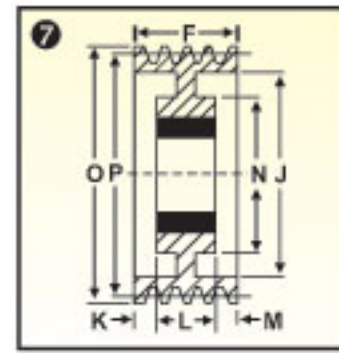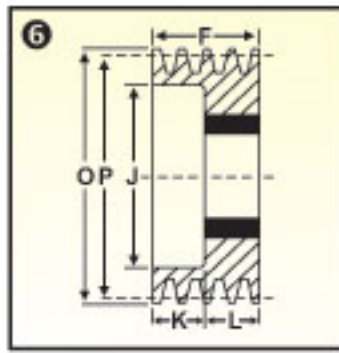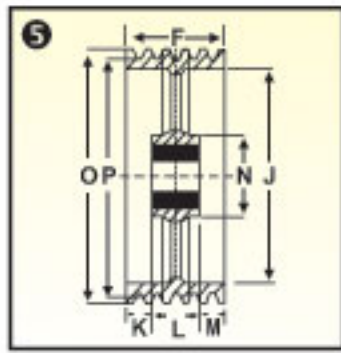





$\frac{1}{4}$ " $\frac{1}{2}$ " $\frac{5}{8}$ " 1"

FOR USE WITH 'SPZ' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
001Z0100	100	1	1210	32	1 $\frac{1}{4}$ "	1	16	-	-	25	9	83	105.5
2Z0100		2	1610	42	1 $\frac{5}{8}$ "	6	28	71	3.0	25	-	-	
3Z0100		3	1610	42	1 $\frac{5}{8}$ "	6	40	71	15.0	25	-	-	
4Z0100		4	2012	50	2"	6	52	71	20.0	32	-	-	
5Z0100		5	2012	50	2"	6	64	71	32.0	32	-	-	
6Z0100		6	2012	50	2"	6	76	71	44.0	32	-	-	
001Z0112	112	1	1610	42	1 $\frac{5}{8}$ "	1	16	-	-	25	9.0	92	117.5
2Z0112		2	1610	42	1 $\frac{5}{8}$ "	6	28	83	3.0	25	-	-	
3Z0112		3	2012	50	2"	6	40	83	8.0	32	-	-	
4Z0112		4	2012	50	2"	6	52	83	20.0	32	-	-	
5Z0112		5	2012	50	2"	6	64	83	32.0	32	-	-	
6Z0112		6	2012	50	2"	6	76	83	44.0	32	-	-	
001Z0125	125	1	1610	42	1 $\frac{5}{8}$ "	1	16	-	-	25	9.0	92	130.5
2Z0125		2	1610	42	1 $\frac{5}{8}$ "	6	28	96	3.0	25	-	-	
3Z0125		3	2012	50	2"	6	40	96	8.0	32	-	-	
4Z0125		4	2012	50	2"	6	52	96	20.0	32	-	-	
5Z0125		5	2517	60	2 $\frac{1}{2}$ "	6	64	96	19.0	45	-	-	
6Z0125		6	2517	60	2 $\frac{1}{2}$ "	6	76	96	31.0	45	-	-	
001Z0140	140	1	1610	42	1 $\frac{5}{8}$ "	1	16	-	-	25	9.0	92	145.5
2Z0140		2	1610	42	1 $\frac{5}{8}$ "	6	28	111	3	25	-	-	
3Z0140		3	2012	50	2"	2	40	111	-	32	8.0	-	
4Z0140		4	2012	50	2"	2	52	111	-	32	20.0	-	
5Z0140		5	2517	60	2 $\frac{1}{2}$ "	2	64	111	-	45	19.0	-	
6Z0140		6	2517	60	2 $\frac{1}{2}$ "	2	76	111	-	45	31.0	-	
001Z0160	160	1	1610	42	1 $\frac{5}{8}$ "	1	16	-	-	25	9.0	92	165.5
2Z0160		2	2012	50	2"	1	28	-	-	32	4.0	112	
3Z0160		3	2012	50	2"	2	40	131	-	32	8.0	-	
4Z0160		4	2517	60	2 $\frac{1}{2}$ "	2	52	131	-	45	7.0	-	
5Z0160		5	2517	60	2 $\frac{1}{2}$ "	2	64	131	-	45	19.0	-	
6Z0160		6	2517	60	2 $\frac{1}{2}$ "	2	76	131	-	45	31.0	-	
001Z0180	180	1	1610	42	1 $\frac{5}{8}$ "	1	16	-	-	25	9.0	92	185.5
2Z0180		2	2012	50	2"	1	28	-	-	32	4.0	112	
3Z0180		3	2012	50	2"	2	40	151	-	32	8.0	-	
4Z0180		4	2517	60	2 $\frac{1}{2}$ "	2	52	151	-	45	7.0	-	
5Z0180		5	2517	60	2 $\frac{1}{2}$ "	2	64	151	-	45	19.0	-	
6Z0180		6	2517	60	2 $\frac{1}{4}$ "	2	76	151	-	45	31.0	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

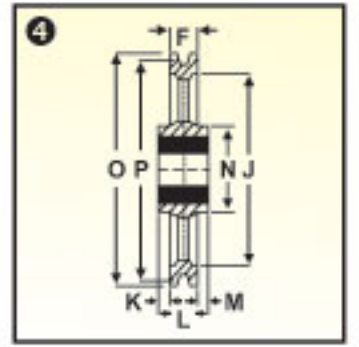





FOR USE WITH 'SPZ' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
001Z0200	200	1	2012	50	2"	1	16	-	-	32.0	16.0	112	205.5
2Z0200		2	2012	50	2"	1	28	171	-	32.0	4.0	124	
3Z0200		3	2012	50	2"	2	40	171	-	32.0	8.0	124	
4Z0200		4	2517	60	2 ½"	3	52	171	3.5	45.0	3.5	-	
5Z0200		5	2517	60	2 ½"	7	64	171	9.5	45.0	9.5	124	
6Z0200		6	2517	60	2 ½"	7	76	171	15.5	45.0	15.5	124	
001Z0250	250	1	2012	50	2"	4	16	221	8.0	32.0	8.0	112	255.5
2Z0250		2	2012	50	2"	4	28	221	2.0	32.0	2.0	112	
3Z0250		3	2012	50	2"	5	40	221	4.0	32.0	4.0	112	
4Z0250		4	2517	60	2 ½"	7	52	221	3.5	45.0	3.5	124	
5Z0250		5	2517	60	2 ½"	5	64	221	9.5	45.0	9.5	124	
6Z0250		6	2517	60	2 ½"	5	76	221	15.5	45.0	15.5	124	
001Z0315	315	1	2012	50	2"	4	16	286	8.0	32.0	8.0	112	320.5
2Z0315		2	2012	50	2"	4	28	286	2.0	32.0	2.0	112	
3Z0315		3	2517	60	2 ½"	8	40	286	2.5	45.0	2.5	124	
4Z0315		4	2517	60	2 ½"	5	52	286	3.5	45.0	3.5	124	
5Z0315		5	2517	60	2 ½"	5	64	286	9.5	45.0	9.5	124	
6Z0315		6	2517	60	2 ½"	5	76	286	15.5	45.0	15.5	124	
001Z0400	400	1	2012	50	2"	4	16	371	8.0	32.0	8.0	112	405.5
2Z0400		2	2517	60	2 ½"	4	28	371	8.5	45.0	8.5	124	
3Z0400		3	2517	60	2 ½"	4	40	371	2.5	45.0	2.5	124	
4Z0400		4	2517	60	2 ½"	5	52	371	3.5	45.0	3.5	124	
5Z0400		5	3020	75	3"	5	64	371	6.5	51.0	6.5	159	
6Z0400		6	3030	75	3"	4	76	371	-	76.0	-	159	
002Z0500	500	2	2517	60	2 ½"	4	28	471	8.5	45.0	8.5	124	505.5
3Z0500		3	2517	60	2 ½"	4	40	471	2.5	45.0	2.5	124	
4Z0500		4	3020	75	3"	5	52	471	0.5	51.0	0.5	159	
5Z0500		5	3020	75	3"	5	64	471	6.5	51.0	6.5	159	
6Z0500		6	3030	75	3"	4	76	471	-	76.0	-	159	
003Z0630		630	3	2517	60	2 ½"	4	40	601	2.5	45.0	2.5	
4Z0630	4		3020	75	3"	5	52	601	0.5	51.0	0.5	159	
5Z0630	5		3030	75	3"	4	64	601	6.0	76.0	6.0	159	
6Z0630	6		3535	90	3 ½"	4	76	601	6.5	89.0	6.5	178	
003Z0800	800	3	3030	75	3"	4	40	771	18.0	76.0	18.0	159	805.5
4Z0800		4	3030	75	3"	4	52	771	12.0	76.0	12.0	159	
5Z0800		5	3535	90	3 ½"	4	64	771	12.5	89.0	12.5	178	
6Z0800		6	3535	90	3 ½"	4	76	771	6.5	89.0	6.5	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

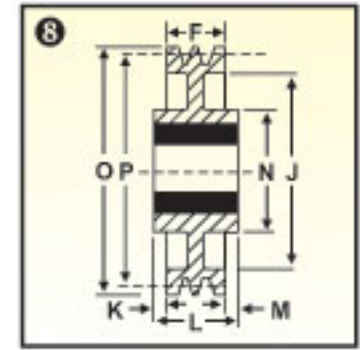
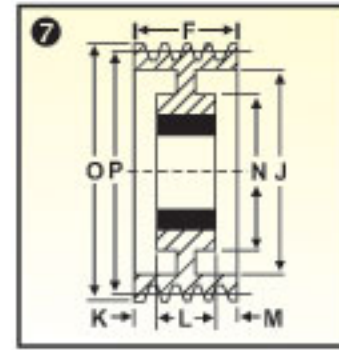
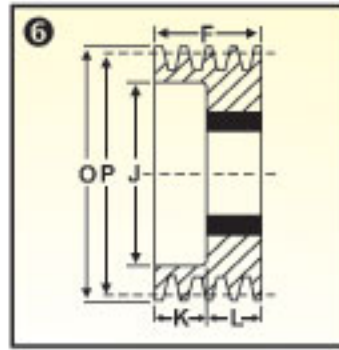
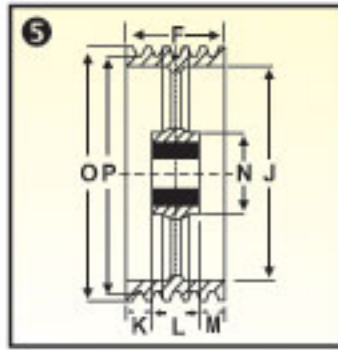


FOR USE WITH 'A' & 'SPA' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
FOR USE WITH 'A' SECTION BELTS													
002A0080		2	1108	28	1 1/4"	6	35	50	13	22	-	-	85.5
3A0080	80	3	1210	32	1 1/4"	6	50	50	25	25	-	-	
4A0080		4	1215	32	1 1/4"	6	65	50	27	38	-	-	
5A0080		5	1215	32	1 1/4"	6	80	50	42	38	-	-	
002A0085		2	1108	28	1 1/4"	6	35	55	13	22	-	-	90.5
3A0085	85	3	1210	32	1 1/4"	6	50	55	25	25	-	-	
4A0085		4	1215	32	1 1/4"	6	65	55	27	38	-	-	
5A0085		5	1215	32	1 1/4"	6	80	55	42	38	-	-	
002A0090		2	1108	28	1 1/4"	6	35	60	13.0	22	-	-	95.5
3A0090	90	3	1610	42	1 3/8"	6	50	60	25.0	25	-	-	
4A0090		4	1615	42	1 3/8"	3	65	60	13.5	38	13.5	-	
5A0090		5	1615	42	1 3/8"	3	80	60	21.0	38	21.0	-	
FOR USE WITH 'A' / 'SPA' SECTION BELTS													
002A0095		2	1610	42	1 3/8"	6	35	65	10.0	25	-	-	100.5
3A0095	95	3	1610	42	1 3/8"	6	50	65	25.0	25	-	-	
4A0095		4	1615	42	1 3/8"	3	65	65	13.5	38	13.5	-	
5A0095		5	1615	42	1 3/8"	3	80	65	21.0	38	21.0	-	
002A0100		2	1610	42	1 3/8"	6	35	65	10.0	25	-	-	105.5
3A0100	100	3	1610	42	1 3/8"	6	50	65	25.0	25	-	-	
4A0100		4	1615	42	1 3/8"	6	65	65	27.0	38	-	-	
5A0100		5	1615	42	1 3/8"	6	80	65	42.0	38	-	-	
002A0106		2	1610	42	1 3/8"	6	35	71	10.0	25	-	-	111.5
3A0106	106	3	1610	42	1 3/8"	6	50	71	25.0	25	-	-	
4A0106		4	1615	42	1 3/8"	6	65	71	27.0	38	-	-	
5A0106		5	2012	50	2"	6	80	71	48.0	32	-	-	
002A0112		2	1610	42	1 3/8"	6	35	77	10.0	25	-	-	117.5
3A0112	112	3	2012	50	2"	6	50	77	18.0	32	-	-	
4A0112		4	2012	50	2"	6	65	77	33.0	32	-	-	
5A0112		5	2012	50	2"	6	80	77	48.0	32	-	-	
002A0118		2	1610	42	1 3/8"	6	35	84	10.0	25	-	-	123.5
3A0118	118	3	2012	50	2"	6	50	84	18.0	32	-	-	
4A0118		4	2012	50	2"	6	65	84	33.0	32	-	-	
5A0118		5	2012	50	2"	6	80	84	48.0	32	-	-	
002A0125		2	1610	42	1 3/8"	2	35	90	-	25	10.0	-	130.5
3A0125	125	3	2012	50	2"	2	50	90	-	32	18.0	-	
4A0125		4	2012	50	2"	2	65	90	-	32	33.0	-	
5A0125		5	2012	50	2"	2	80	90	-	32	48.0	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

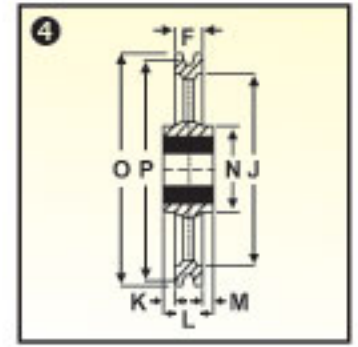





FOR USE WITH 'A' / 'SPA' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
002A0132	132	2	1610	42	1 1/2"	2	35	98	-	25	10.0	-	137.5
3A0132		3	2012	50	2"	2	50	98	-	32	18.0	-	
4A0132		4	2517	60	2 1/2"	2	65	98	-	45	20.0	-	
5A0132		5	2517	60	2 1/2"	2	80	98	-	45	35.0	-	
002A0140	140	2	2012	50	2"	6	35	105	3	32	-	-	145.5
3A0140		3	2517	60	2 1/2"	2	50	105	-	45	5.0	-	
4A0140		4	2517	60	2 1/2"	2	65	105	-	45	20.0	-	
5A0140		5	2517	60	2 1/2"	2	80	105	-	45	35.0	-	
002A0150	150	2	2012	50	2"	6	35	115	3.0	32	-	-	155.5
3A0150		3	2517	60	2 1/2"	2	50	115	-	45	5.0	-	
4A0150		4	2517	60	2 1/2"	2	65	115	-	45	20.0	-	
5A0150		5	2517	60	2 1/2"	2	80	115	-	45	35.0	-	
002A0160	160	2	2012	50	2"	6	35	125	3.0	32	-	-	165.5
3A0160		3	2517	60	2 1/2"	2	50	125	-	45	5.0	-	
4A0160		4	2517	60	2 1/2"	2	65	125	-	45	20.0	-	
5A0160		5	2517	60	2 1/2"	2	80	125	-	45	35.0	-	
002A0180	180	2	2012	50	2"	2	35	145	-	32	3.0	-	185.5
3A0180		3	2517	60	2 1/2"	2	50	145	-	45	5.0	-	
4A0180		4	2517	60	2 1/2"	2	65	145	-	45	20.0	-	
5A0180		5	3020	75	3"	2	80	145	-	51	29.0	-	
002A0200	200	2	2517	60	2 1/2"	8	35	165	-	45	10.0	124	205.5
3A0200		3	2517	60	2 1/2"	3	50	165	2.5	45	2.5	-	
4A0200		4	3020	75	3"	2	65	165	-	51	14.0	-	
5A0200		5	3020	75	3"	2	80	165	-	51	29.0	-	
002A0250	250	2	2517	60	2 1/2"	8	35	215	-	45	10.0	124	255.5
3A0250		3	2517	60	2 1/2"	7	50	215	2.5	45	2.5	124	
4A0250		4	3020	75	3"	7	65	215	7.0	51	7.0	159	
5A0250		5	3020	75	3"	7	80	215	14.5	51	14.5	159	
002A0315	315	2	2517	60	2 1/2"	4	35	280	-	45	10.0	124	320.5
3A0315		3	3020	75	3"	8	50	280	0.5	51	0.5	159	
4A0315		4	3020	75	3"	7	65	280	7.0	51	7.0	159	
5A0315		5	3535	90	3 1/2"	8	80	280	4.5	89	4.5	178	
002A0400	400	2	2517	60	2 1/2"	4	35	365	-	45	10.0	124	405.5
3A0400		3	3020	75	3"	4	50	365	0.5	51	0.5	159	
4A0400		4	3020	75	3"	5	65	365	7.0	51	7.0	159	
5A0400		5	3535	90	3 1/2"	4	80	365	4.5	89	4.5	178	
002A0500	500	2	2517	60	2 1/2"	4	35	465	-	45	10.0	124	505.5
3A0500		3	3020	75	3"	4	50	465	0.5	51	0.5	159	
4A0500		4	3020	75	3"	5	65	465	7.0	51	7.0	159	
5A0500		5	3535	90	3 1/2"	4	80	465	4.5	89	4.5	178	
002A0630	630	2	3020	75	3"	4	35	595	-	51	16.0	159	635.5
3A0630		3	3020	75	3"	4	50	595	0.5	51	0.5	159	
4A0630		4	3535	90	3 1/2"	4	65	595	12.0	89	12.0	178	
5A0630		5	3535	90	3 1/2"	4	80	595	4.5	89	4.5	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

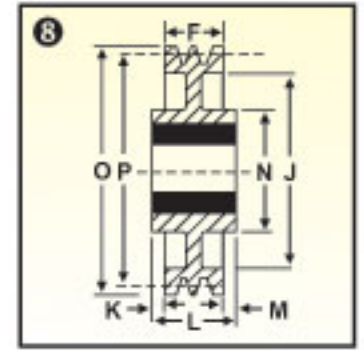
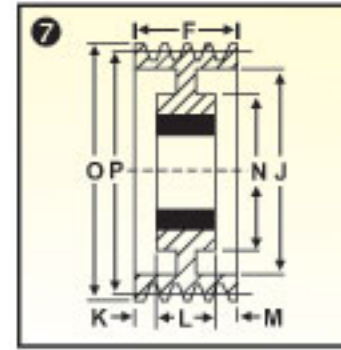
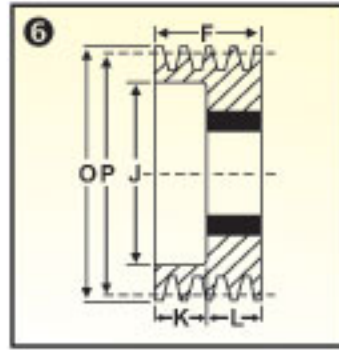
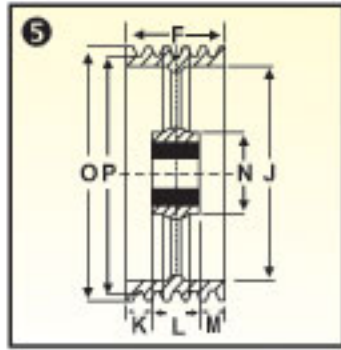


FOR USE WITH 'B' & 'SPB' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
FOR USE WITH 'B' SECTION BELTS													
002B0125		2	1610	42	1 ½'	6	44	85	19.0	25	-	-	
3B0125		3	1610	42	1 ½'	6	63	85	38.0	25	-	-	
4B0125	125	4	2012	50	2"	3	82	89	25.0	32	25.0	-	132
5B0125		5	2012	50	2"	3	101	89	34.5	32	34.5	-	
6B0125		6	2012	50	2"	3	120	89	44.0	32	44.0	-	
002B0132		2	1610	42	1 ½'	6	44	92	19.0	25	-	-	
3B0132		3	1610	42	1 ½'	6	63	92	38.0	25	-	-	
4B0132	132	4	2012	50	2"	3	82	92	25.0	32	25.0	-	139
5B0132		5	2012	50	2"	2	101	92	-	32	69.0	-	
6B0132		6	2012	50	2"	3	120	92	44.0	32	44.0	-	
002B0140		2	1610	42	1 ½'	6	44	100	19.0	25	-	-	
3B0140		3	1610	42	1 ½'	6	63	100	38.0	25	-	-	
4B0140	140	4	2012	50	2"	3	82	100	25.0	32	25.0	-	147
5B0140		5	2012	50	2"	2	101	100	-	32	69.0	-	
6B0140		6	2517	60	2 ½'	3	120	109	37.5	45	37.5	-	
002B0150		2	1610	42	1 ½'	6	44	110	19.0	25	-	-	
3B0150		3	2012	50	2"	6	63	110	31.0	32	-	-	
4B0150	150	4	2012	50	2"	3	82	110	25.0	32	25.0	-	157
5B0150		5	2517	60	2 ½'	2	101	110	-	45	56.0	-	
6B0150		6	2517	60	2 ½'	2	120	110	-	45	75.0	-	
FOR USE WITH 'B' / 'SPB' SECTION BELTS													
002B0160		2	2012	50	2"	6	44	114	12.0	32	-	-	
3B0160		3	2517	60	2 ½"	6	63	114	18.0	45	-	-	
4B0160	160	4	2517	60	2 ½"	3	82	114	18.5	45	18.5	-	167
5B0160		5	2517	60	2 ½"	3	101	114	28.0	45	28.0	-	
6B0160		6	2517	60	2 ½"	2	120	114	-	45	75.0	-	
002B0170		2	2012	50	2"	6	44	124	12.0	32	-	-	
3B0170		3	2517	60	2 ½"	6	63	124	18.0	45	-	-	
4B0170	170	4	2517	60	2 ½"	3	82	124	18.5	45	18.5	-	177
5B0170		5	3020	75	3"	3	101	128	25.0	51	25.0	-	
6B0170		6	3020	75	3"	2	120	128	-	51	69.0	-	
002B0180		2	2012	50	2"	6	44	134	12.0	32	-	-	
3B0180		3	2517	60	2 ½"	6	63	134	18.0	45	-	-	
4B0180	180	4	2517	60	2 ½"	3	82	134	18.5	45	18.5	-	187
5B0180		5	3020	75	3"	3	101	134	25.0	51	25.0	-	
6B0180		6	3020	75	3"	2	120	134	-	51	69.0	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

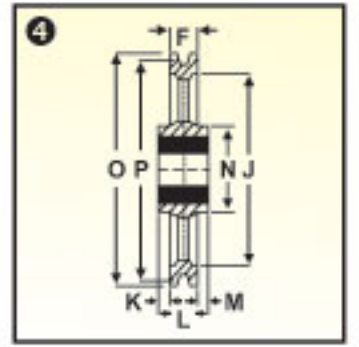





FOR USE WITH 'B' / 'SPB' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
002B0190	190	2	2517	60	2 ½"	1	44	-	-	44	-	-	197
3B0190		3	2517	60	2 ½"	6	63	144	18.0	45	-	-	
4B0190		4	2517	60	2 ½"	3	82	144	18.5	45	18.5	-	
5B0190		5	3020	75	3"	3	101	144	25.0	51	25.0	-	
6B0190		6	3020	75	3"	2	120	144	-	51	69.0	-	
002B0200	200	2	2517	60	2 ½"	1	44	-	-	44	-	-	207
3B0200		3	2517	60	2 ½"	2	63	154	-	45	18.0	-	
4B0200		4	3020	75	3"	2	82	154	-	51	31.0	-	
5B0200		5	3020	75	3"	2	101	154	-	51	50.0	-	
6B0200		6	3020	75	3"	2	120	154	-	51	69.0	-	
002B0212	212	2	2517	60	2 ½"	1	44	-	-	44	-	-	219
3B0212		3	2517	60	2 ½"	2	63	166	-	45	18.0	-	
4B0212		4	3020	75	3"	2	82	166	-	51	31.0	-	
5B0212		5	3020	75	3"	2	101	166	-	51	50.0	-	
6B0212		6	3020	75	3"	2	120	166	-	51	69.0	-	
002B0224	224	2	2517	60	2 ½"	1	44	-	-	44	-	-	231
3B0224		3	2517	60	2 ½"	2	63	178	-	45	18.0	-	
4B0224		4	3020	75	3"	2	82	178	-	51	31.0	-	
5B0224		5	3020	75	3"	2	101	178	-	51	50.0	-	
6B0224		6	3020	75	3"	2	120	178	-	51	69.0	-	
002B0236	236	2	2517	60	2 ½"	1	44	-	-	44	-	-	243
3B0236		3	2517	60	2 ½"	2	63	190	-	45	18.0	-	
4B0236		4	3020	75	3"	2	82	190	-	51	31.0	-	
5B0236		5	3020	75	3"	2	101	190	-	51	50.0	-	
6B0236		6	3020	75	3"	2	120	190	-	51	69.0	-	
002B0250	250	2	2517	60	2 ½"	8	44	-	-	44	-	-	257
3B0250		3	3020	75	3"	2	63	204	-	51	12.0	-	
4B0250		4	3020	75	3"	2	82	204	-	51	31.0	-	
5B0250		5	3020	75	3"	2	101	204	-	51	50.0	-	
6B0250		6	3020	75	3"	2	120	204	-	51	69.0	-	
002B0280	280	2	2517	60	2 ½"	8	44	234	0.5	45	0.5	124	287
3B0280		3	3020	75	3"	7	63	234	6.0	51	6.0	159	
4B0280		4	3020	75	3"	7	82	234	15.5	51	15.5	159	
5B0280		5	3535	90	3 ½"	7	101	234	6.0	89	6.0	178	
6B0280		6	3535	90	3 ½"	7	120	234	15.5	89	15.5	178	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

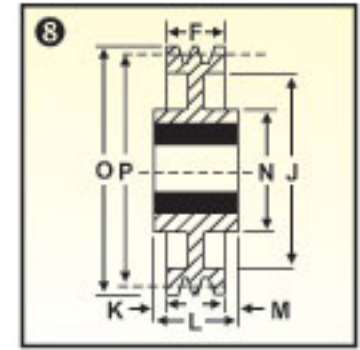
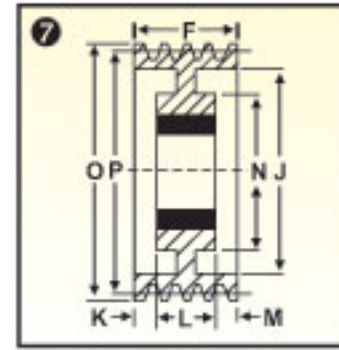
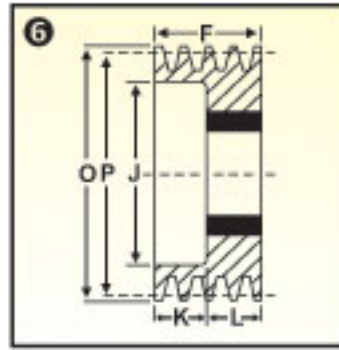
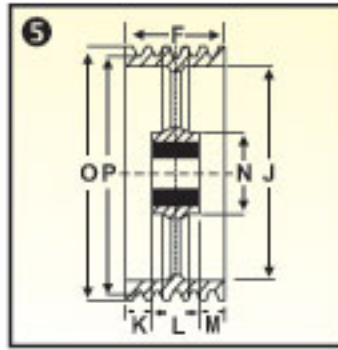


FOR USE WITH 'B' / 'SPB' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
002B0315	315	2	2517	60	2 1/2"	8	44	269	0.5	45	0.5	124	322
3B0315		3	3020	75	3"	7	63	269	6.0	51	6.0	159	
4B0315		4	3535	90	3 1/2"	8	82	269	3.5	89	3.5	178	
5B0315		5	3535	90	3 1/2"	7	101	269	6.0	89	6.0	178	
6B0315		6	3535	90	3 1/2"	7	120	269	15.5	89	15.5	178	
002B0355		355	2	3020	75	3"	4	44	309	3.5	51	3.5	
3B0355	3		3020	75	3"	5	63	309	6.0	51	6.0	159	
4B0355	4		3535	90	3 1/2"	8	82	309	3.5	89	3.5	178	
5B0355	5		3535	90	3 1/2"	7	101	309	6.0	89	6.0	178	
6B0355	6		3535	90	3 1/2"	7	120	309	15.5	89	15.5	178	
002B0400	400		2	3020	75	3"	4	44	354	3.5	51	3.5	159
3B0400		3	3535	90	3 1/2"	4	63	354	13.0	89	13.0	178	
4B0400		4	3535	90	3 1/2"	4	82	354	3.5	89	3.5	178	
5B0400		5	3535	90	3 1/2"	5	101	354	6.0	89	6.0	178	
6B0400		6	3535	90	3 1/2"	5	120	354	15.5	89	15.5	178	
002B0500		500	2	3020	75	3"	4	44	454	3.5	51	3.5	159
3B0500	3		3535	90	3 1/2"	4	63	454	13.0	89	13.0	178	
4B0500	4		3535	90	3 1/2"	4	82	454	3.5	89	3.5	178	
5B0500	5		3535	90	3 1/2"	5	101	454	6.0	89	6.0	178	
6B0500	6		4040	100	4"	5	120	454	9.0	102	9.0	216	
002B0630	630		2	3030	75	3"	4	44	584	16.0	76	16.0	159
3B0630		3	3535	90	3 1/2"	4	63	584	13.0	89	13.0	178	
4B0630		4	3535	90	3 1/2"	4	82	584	3.5	89	3.5	178	
5B0630		5	4040	100	4"	4	101	584	0.5	102	0.5	216	
6B0630		6	4040	100	4"	5	120	584	9.0	102	9.0	216	
002B0800		800	2	3030	75	3"	4	44	754	16.0	76	16.0	159
3B0800	3		3535	90	3 1/2"	4	63	754	13.0	89	13.0	178	
4B0800	4		4040	100	4"	4	82	754	10.0	102	10.0	216	
5B0800	5		4040	100	4"	4	101	754	0.5	102	0.5	216	
6B0800	6		4545	110	4 1/2"	5	120	754	3.0	114	3.0	242	
003B1000	1000		3	4040	100	4"	4	63	954	19.5	102	19.5	216
4B1000		4	4040	100	4"	4	82	954	10.0	102	10.0	216	
5B1000		5	4545	110	4 1/2"	4	101	954	6.5	114	6.5	242	
6B1000		6	4545	110	4 1/2"	5	120	954	3.0	114	3.0	242	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

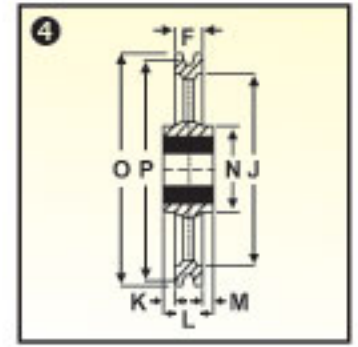





FOR USE WITH 'C' & 'SPC' SECTION BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
FOR USE WITH 'C' SECTION BELTS													
004C0200		4	3020	75	3"	3	111	151	30.0	51	30.0	-	
5C0200		5	3535	90	3 1/2"	3	136	151	16.0	89	31.0	-	
6C0200	200	6	3535	90	3 1/2"	3	162	151	16.0	89	57.0	-	209.6
7C0200		7	3535	90	3 1/2"	3	187	151	36.0	89	62.0	-	
8C0200		8	3535	90	3 1/2"	3	213	151	46.0	89	78.0	-	
004C0212		4	3020	75	3"	3	111	163	30.0	51	30.0	-	
5C0212		5	3535	90	3 1/2"	3	136	163	16.0	89	31.0	-	
6C0212	212	6	3535	90	3 1/2"	3	162	163	36.5	89	36.5	-	221.6
7C0212		7	3535	90	3 1/2"	3	187	163	36.0	89	62.0	-	
8C0212		8	3535	90	3 1/2"	3	213	163	46.0	89	78.0	-	
FOR USE WITH 'C' / 'SPC' SECTION BELTS													
004C0224		4	3535	90	3 1/2"	3	111	161	11.0	89	11.0	-	
5C0224		5	3535	90	3 1/2"	3	136	161	23.5	89	23.5	-	
6C0224	224	6	3535	90	3 1/2"	3	162	161	36.5	89	36.5	-	233.6
7C0224		7	3535	90	3 1/2"	3	187	161	36.0	89	62.0	-	
8C0224		8	3535	90	3 1/2"	3	213	161	46.0	89	78.0	-	
004C0236		4	3535	90	3 1/2"	3	111	173	11.0	89	11.0	-	
5C0236		5	3535	90	3 1/2"	3	136	173	23.5	89	23.5	-	
6C0236	236	6	3535	90	3 1/2"	3	162	173	36.5	89	36.5	-	245.6
7C0236		7	3535	90	3 1/2"	3	187	173	36.0	89	62.0	-	
8C0236		8	3535	90	3 1/2"	3	213	173	46.0	89	78.0	-	
004C0250		4	3535	90	3 1/2"	3	111	187	11.0	89	11.0	-	
5C0250		5	3535	90	3 1/2"	3	136	187	23.5	89	23.5	-	
6C0250	250	6	3535	90	3 1/2"	3	162	187	36.5	89	36.5	-	259.6
7C0250		7	3535	90	3 1/2"	3	187	187	36.0	89	62.0	-	
8C0250		8	3535	90	3 1/2"	3	213	187	62.0	89	62.0	-	
004C0265		4	3535	90	3 1/2"	3	111	202	11.0	89	11.0	-	
5C0265		5	3535	90	3 1/2"	3	136	202	23.5	89	23.5	-	
6C0265	265	6	3535	90	3 1/2"	3	162	202	36.5	89	36.5	-	274.6
7C0265		7	3535	90	3 1/2"	3	187	202	36.0	89	62.0	-	
8C0265		8	3535	90	3 1/2"	3	213	202	62.0	89	62.0	-	
004C0280		4	3535	90	3 1/2"	3	111	217	11.0	89	11.0	-	
5C0280		5	3535	90	3 1/2"	3	136	217	23.5	89	23.5	-	
6C0280	280	6	3535	90	3 1/2"	3	162	217	36.5	89	36.5	-	289.6
7C0280		7	3535	90	3 1/2"	3	187	217	36.0	89	62.0	-	
8C0280		8	3535	90	3 1/2"	3	213	217	62.0	89	62.0	-	
004C0300		4	3535	90	3 1/2"	7	111	237	11.0	89	11.0	178	
5C0300		5	3535	90	3 1/2"	7	136	237	23.5	89	23.5	178	
6C0300	300	6	3535	90	3 1/2"	7	162	237	36.5	89	36.5	178	309.6
7C0300		7	3535	90	3 1/2"	7	187	237	49.0	89	49.0	178	
8C0300		8	4040	100	4"	3	213	237	55.5	102	55.5	-	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

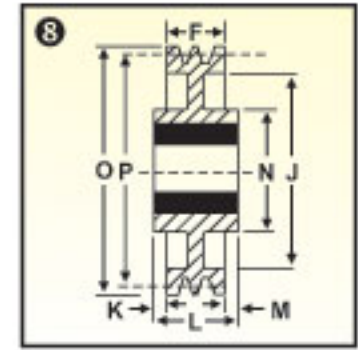
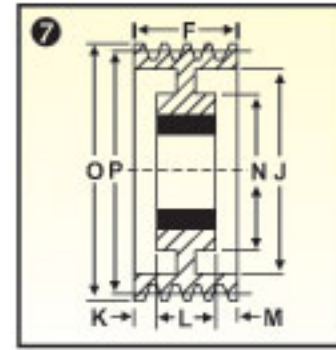
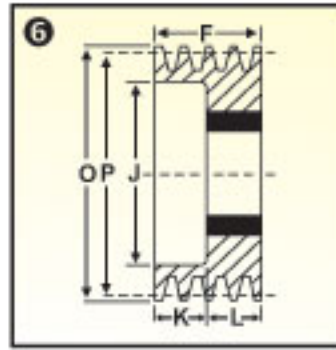
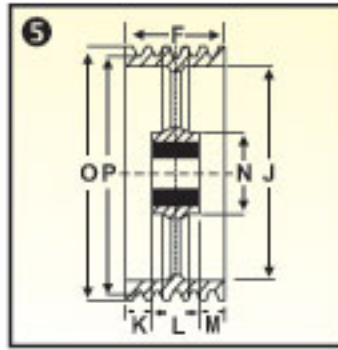


FOR USE WITH 'C' / 'SPC' BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
004C0315	315	4	3535	90	3 1/2"	7	111	252	11.0	89	11.0	178	324.6
5C0315		5	3535	90	3 1/2"	7	136	252	23.5	89	23.5	178	
6C0315		6	3535	90	3 1/2"	7	162	252	36.5	89	36.5	178	
7C0315		7	3535	90	3 1/2"	7	187	252	49.0	89	49.0	178	
8C0315		8	4040	100	4"	3	213	252	55.5	102	55.5	-	
004C0335	335	4	3535	90	3 1/2"	7	111	272	11.0	89	11.0	178	344.6
5C0335		5	3535	90	3 1/2"	7	136	272	23.5	89	23.5	178	
6C0335		6	3535	90	3 1/2"	7	162	272	36.5	89	36.5	178	
7C0335		7	3535	90	3 1/2"	7	187	272	49.0	89	49.0	178	
8C0335		8	4040	100	4"	3	213	272	55.5	102	55.5	-	
004C0355	355	4	3535	90	3 1/2"	7	111	292	11.0	89	11.0	178	364.6
5C0355		5	3535	90	3 1/2"	7	136	292	23.5	89	23.5	178	
6C0355		6	3535	90	3 1/2"	7	162	292	36.5	89	36.5	178	
7C0355		7	4040	100	4"	7	187	292	42.5	102	42.5	216	
8C0355		8	4040	100	4"	7	213	292	55.5	102	55.5	216	
004C0375	375	4	3535	90	3 1/2"	7	111	312	11.0	89	11.0	178	384.6
5C0375		5	3535	90	3 1/2"	7	136	312	23.5	89	23.5	178	
6C0375		6	4040	100	4"	7	162	312	30.0	102	30.0	216	
7C0375		7	4040	100	4"	7	187	312	42.5	102	42.5	216	
8C0375		8	4545	110	4 1/2"	7	213	312	49.5	114	49.5	242	
004C0400	400	4	3535	90	3 1/2"	5	111	337	11.0	89	11.0	178	409.6
5C0400		5	3535	90	3 1/2"	5	136	337	23.5	89	23.5	178	
6C0400		6	4040	100	4"	7	162	337	30.0	102	30.0	216	
7C0400		7	4545	110	4 1/2"	7	187	337	36.5	114	36.5	242	
8C0400		8	4545	110	4 1/2"	7	213	337	49.5	114	49.5	242	
004C0425	425	4	3535	90	3 1/2"	5	111	362	11.0	89	11.0	178	434.6
5C0425		5	4040	100	4"	7	136	362	17.0	102	17.0	216	
6C0425		6	4545	110	4 1/2"	7	162	362	24.0	114	24.0	242	
7C0425		7	4545	110	4 1/2"	7	187	362	36.5	114	36.5	242	
8C0425		8	5050	125	5"	7	213	362	43.0	127	43.0	267	
004C0450	450	4	3535	90	3 1/2"	5	111	387	11.0	89	11.0	178	459.6
5C0450		5	4040	100	4"	5	136	387	17.0	102	17.0	216	
6C0450		6	4545	110	4 1/2"	7	162	387	24.0	114	24.0	242	
7C0450		7	5050	125	5"	7	187	387	30.0	127	30.0	267	
8C0450		8	5050	125	5"	7	213	387	43.0	127	43.0	267	
004C0475	475	4	3535	90	3 1/2"	5	111	412	11.0	89	11.0	178	484.6
5C0475		5	4040	100	4"	5	136	412	17.0	102	17.0	216	
6C0475		6	4545	110	4 1/2"	7	162	412	24.0	114	24.0	242	
7C0475		7	5050	125	5"	7	187	412	30.0	127	30.0	267	
8C0475		8	5050	125	5"	7	213	412	43.0	127	43.0	267	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

F Taper Lock® Dual Duty Pulleys

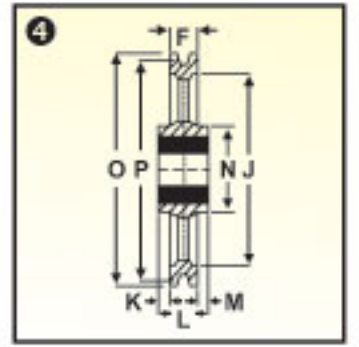

FOR USE WITH 'C' / 'SPC' BELTS

Product Code	Pitch Dia(P)	No. of Grooves	Bush No.	Max. Bore		Pulley Type	F	J	K	L	M	N	Outside Dia (O)
				Met.	Imp.								
004C0500	500	4	3535	90	3 1/2"	5	111	437	11.0	89	11.0	178	509.6
5C0500		5	4040	100	4"	5	136	437	17.0	102	17.0	216	
6C0500		6	4545	110	4 1/2"	5	162	437	24.0	114	24.0	242	
7C0500		7	5050	125	5"	7	187	437	30.0	127	30.0	267	
8C0500		8	5050	125	5"	7	213	437	43.0	127	43.0	267	
004C0530	530	4	4040	100	4"	5	111	467	4.5	102	4.5	216	539.6
5C0530		5	4545	110	4 1/2"	5	136	467	11.0	114	11.0	242	
6C0530		6	5050	125	5"	5	162	467	17.5	127	17.5	267	
7C0530		7	5050	125	5"	7	187	467	30.0	127	30.0	267	
8C0530		8	5050	125	5"	7	213	467	43.0	127	43.0	267	
004C0560	560	4	4040	100	4"	5	111	497	4.5	102	4.5	216	569.6
5C0560		5	4545	110	4 1/2"	5	136	497	11.0	114	11.0	242	
6C0560		6	5050	125	5"	5	162	497	17.5	127	17.5	267	
7C0560		7	5050	125	5"	5	187	497	30.0	127	30.0	267	
8C0560		8	5050	125	5"	5	213	497	43.0	127	43.0	267	
004C0630	630	4	4545	110	4 1/2"	4	111	567	1.5	114	1.5	242	639.6
5C0630		5	5050	125	5"	5	136	567	4.5	127	4.5	267	
6C0630		6	5050	125	5"	5	162	567	17.5	127	17.5	267	
7C0630		7	5050	125	5"	5	187	567	30.0	127	30.0	267	
8C0630		8	5050	125	5"	5	213	567	43.0	127	43.0	267	
004C0800	800	4	5050	125	5"	4	111	737	8.0	127	8.0	267	809.6
5C0800		5	5050	125	5"	5	136	737	4.5	127	4.5	267	
6C0800		6	5050	125	5"	5	162	737	17.5	127	17.5	267	
7C0800		7	5050	125	5"	5	187	737	30.0	127	30.0	267	
8C0800		8	5050	125	5"	5	213	737	43.0	127	43.0	267	
004C1000	1000	4	5050	125	5"	4	111	937	8.0	127	8.0	267	1009.6
5C1000		5	5050	125	5"	5	136	937	4.5	127	4.5	267	
6C1000		6	5050	125	5"	5	162	937	17.5	127	17.5	267	
7C1000		7	5050	125	5"	5	187	937	30.0	127	30.0	267	
8C1000		8	5050	125	5"	5	213	937	43.0	127	43.0	267	
004C1250	1250	4	5050	125	5"	4	111	1187	8.0	127	8.0	267	1259.6
5C1250		5	5050	125	5"	5	136	1187	4.5	127	4.5	267	
6C1250		6	5050	125	5"	5	162	1187	17.5	127	17.5	267	
7C1250		7	5050	125	5"	5	187	1187	30.0	127	30.0	267	
8C1250		8	5050	125	5"	5	213	1187	43.0	127	43.0	267	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED